


Rating [A]	Color	Volt [V]	iMaXX ref.
20	Blue	32	L020AS
30	Pink	32	L030AS
40	Green	32	L040AS
50	Red	32	L050AS
60	Yellow	32	L060AS

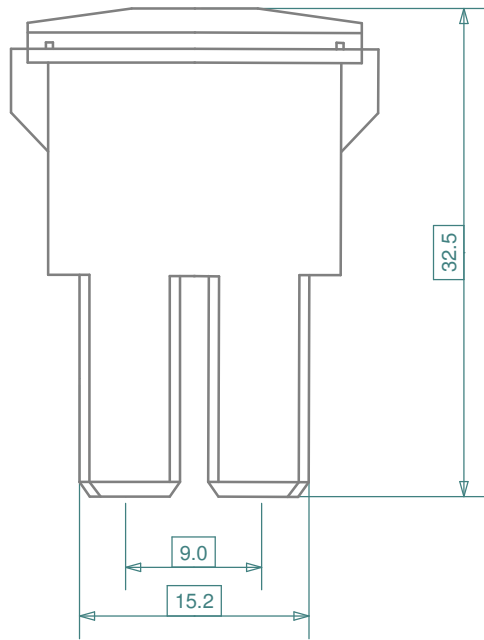

Fusing gates [s]		
Load [%]	Minimum [s]	Maximum [s]
110 %	360,000	-
200 %	5	100
350 %	0.2	7
400 %	0.04	1

Materials	
Body	PA66-GF20
Cover	PC, clear
Element	Cu alloy

Revisions			Drawn	Date	Appr.
a	07/07	re-drawn	Checked	03/16	BE
b	03/16	re-drawn	Standards		
			Approved	03/16	AdH



		Scale 2 : 1		Title	L - AS series, japOTO SlowBlow fuse
		Projection	Tolerance ± 0.2 mm unless otherwise noted	Drawing type	schematic
				Drawing number	L - AS drawing 1
				Sheet	1 of 1
				Layers	0 1 2 4 6 9